

# ENFORCER®

## Electric Deadbolt from SECO-LARM®

### MODEL: SD-997B

The **SD-997B** is for hollow metal door frames. It is not recommended for use with wooden door frames. However, the door can be wood or metal.

#### FEATURES:


- Adds concealed deadbolt security to most wood or hollow metal doors, with the added convenience of electrical operation.
- Stainless steel bolt,  $\frac{5}{8}$ " diameter,  $\frac{5}{8}$ " throw.
- Fail-safe operation (unlocks if power is lost).
- Door open/close monitor (NO/C/NC).
- Adjustable door lock delay timer (0, 2.5, 5, or 9 seconds).
- Magnetic switch determines door position for positive locking.
- Solenoid shuts off if door not closed properly to prevent burning out.
- Use with an optional digital keypad for high security without a key.
- Easily connects to SECO-LARM's SK-983A Electronic Keypad.
- Suitable for office-type applications.
- Lock body (faceplate) dimensions –  $7\frac{7}{8}$ " x  $1\frac{5}{16}$ " (200 x 32 mm).
- Lock body (cavity) dimensions –  $5\frac{3}{4}$ " x  $1\frac{1}{8}$ " x  $1\frac{1}{2}$ " (145 x 28 x 38 mm).
- Strike plate dimensions –  $3\frac{9}{16}$ " x 1" x  $\frac{1}{8}$ " (90 x 25 x 3 mm).
- Shallow design for use with most metal door jambs.
- Powered by a solenoid.
- Stainless steel for strength and long life.
- Power — 12VDC, 900mA on activation, 360mA on holding.



#### MOUNTING LOCATION

Can be used opposite the hinges, or for the header or on top of the door away from the hinges. Mounting on the bottom of the door is not recommended because of the possibility of dirt and dust buildup. (see fig. 1 below)

**FIG. 1 - Possible mounting locations**

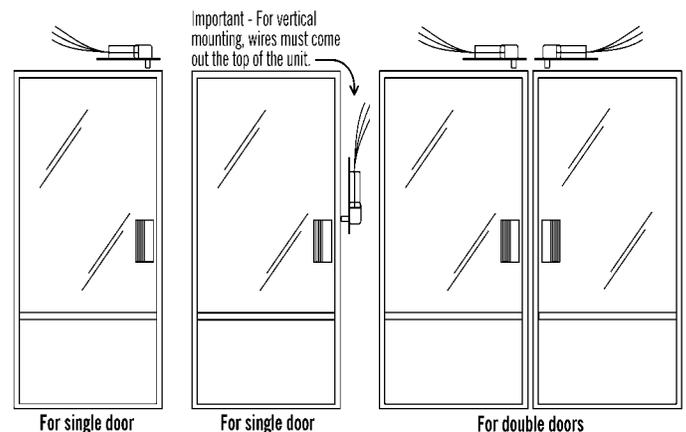

The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is not responsible for misprints.

**SUPERIOR ELECTRONICS CORPORATION**  
P.O. BOX 57-81, TAIPEI 106, TAIWAN, R.O.C.  
Copyright © 2000 SECO-LARM®. All right reserved.

Tel: 886-2-2378-6161 / Fax: 886-2-2378-6163  
E-mail: [info@superior-elec.com](mailto:info@superior-elec.com)  
Url: <http://www.enforcer.com.tw> or [www.superior-elec.com](http://www.superior-elec.com)